


## CSL-6000 SERIES


### CSL-6106 / 6112 / 6120

- 3 models available 6W, 12W and 20W
- Metal plate and grille
- Built-in 6.5" speaker
- Designed for airport, hotel, school or office for full-range broadcasting

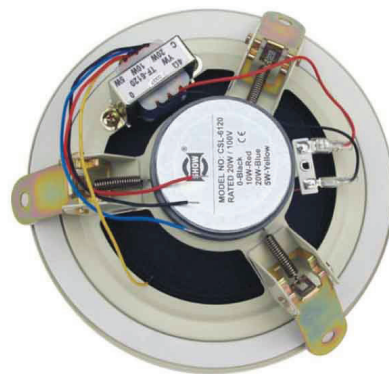


CSL-6106 / 6112 / 6120


CSL-6106

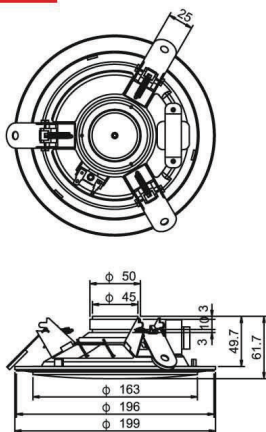

CSL-6112

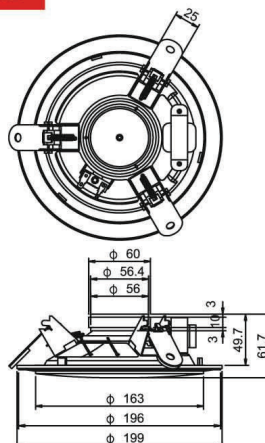

CSL-6120

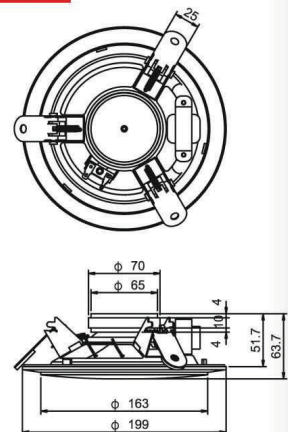

Unit: mm

MODEL	CSL-6106	CSL-6112	CSL-6120
Speaker	6.5"-4 Ω speaker	6.5"-4 Ω speaker	6.5"-4 Ω speaker
Input Power	RMS 6W	RMS 12W	RMS 20W
Output Power	1.5, 3, 6W	3, 6, 12W	5, 10, 20W
Input Voltage	6.6K Ω / 3.3K Ω / 1.66K Ω	3.3K Ω / 1.66K Ω / 833 Ω	2K Ω / 1K Ω / 500 Ω
Impedance	100V	100V	100V
Frequency Response	100~20KHz	100~20KHz	100~20KHz
S.P.L	86dB (1M/W)	88dB (1M/W)	90dB (1M/W)