

# P.A. Speakers

## Ceiling Speakers

### CSL-305 / 407 / 410

These ceiling speakers are designed for speech and music applications and surface mounting in ceilings. This series has full-range speakers for general purpose. The body is in white-color ABS resin and with metal grille. 3-position selection can adjust the sound power. Two spring-loaded ceiling clamps that enables secure mounting.

### CSL-305 / 407 / 410



CSL-305




CSL-407 / CSL-410




BRACKET HOLDER (Enclosed)

#### CSL-305

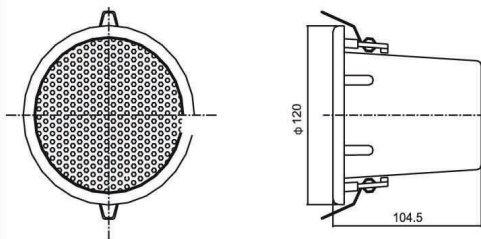

#### CSL-407/CSL-410

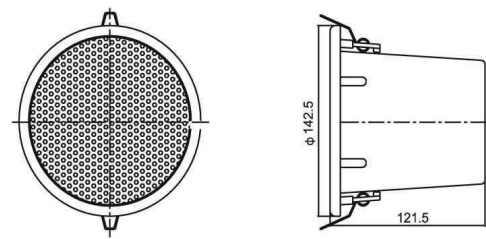

Unit: mm

MODEL	CSL-305	CSL-407	CSL-410
Input Power	RMS 5W	RMS 5W	RMS 5W
Output Power	1.25, 2.5, 5W	1.75, 3.5, 7W	2.5, 5, 10W
Speaker	3"-8 Ω paper cone speaker	4"-8 Ω paper cone speaker	4"-8 Ω paper cone speaker
Input Voltage	50, 70, 100V	50, 70, 100V	50, 70, 100V
Impedance	100V-8K Ω / 4K Ω / 2K Ω 70V-4K Ω / 2K Ω / 980 Ω 50V-2K Ω / 980 Ω / 500 Ω	100V-5.7K Ω / 2.8K Ω / 1.4K Ω 70V-2.8K Ω / 1.4K Ω / 700 Ω 50V-1.4K Ω / 700 Ω / 357 Ω	100V-4K Ω / 2K Ω / 1K Ω 70V-2K Ω / 1K Ω / 490 Ω 50V-1K Ω / 490 Ω / 250 Ω
Frequency Response	250~16KHz	100~16KHz	100~16KHz
S.PL	84dB (1W/ M)	92dB (1W/ M)	92dB (1W/ M)
Material	ABS plastic (metal grille)	ABS plastic (metal grille)	ABS plastic (metal grille)